Vinyl Composition Tile / Gallant GR

Gallant GR is the most widely used vinyl composition tile with reasonable cost.

Chips are inserted from the surface through to the bottom to maintain the original color and shape even after wear off.

•

Hospital





School




Office





Cafe Restaurant

Construction

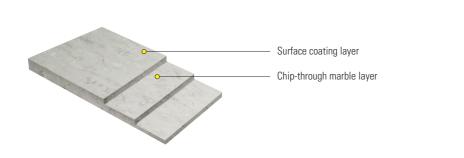


Technical Data

	Reference Specif	ication	
ASTM F 1066 Class II, Through Pattern Tile			rn Tile
	General Prope	rties	
Characteristic	Standard	Unit	Gallant GR
SIZE	ASTM F 2055	mm	450
THICKNESS	ASTM F 386	mm	3.0
SQUARENESS	ASTM F 2055	mm	≤ 0.254
DIMENSIONAL STABILITY	ASTM F 2199		Passed
INDENTATION	ASTM F 1914		Passed
STATIC LOAD LIMIT	ASTM F 970	psi	250
	Fire Resistan	ce	
CRITICAL RADIANT FLUX	ASTM E 648	W/cm²	≤ 0.45Watts/cm²
			NFPA Class I
			< 450 - Passed
SMOKE DENSITY	ASTM E 662		< 450 - Passed
	General Prope	rties	
ISO 9001 - QUALITY MANAGEMENT S'	YSTEM STANDARD		
ISO 14001 - ENVIRONMENTAL MANAG	GEMENT SYSTEM STANDARD		
LG HAUSYS RESPONSIBLE CARE – GLO	DBAL COMMITMENT AND INITIATIVE		
	Warranty		
■ Guarantee for manufacturing defects and wear-out*			5 Years

* Warranty is valid only when installed in accordance with LG Hausys's Installation & Maintenance guide.

Feature


• Cutting-edge SQUARING technology makes a state-of-the-art side cutting quality
















• Double Coating system

• Surface SANDING finishing creates an elegant surface





Surface SANDING makes for compact and fine surface finishing that is elegant

Double Coating increases strength protections

Y

Eco & Human-friendly Product

· FloorScore® certified for low VOCs

 $\cdot \ Phthalate \ Free(DEHP \cdot DBP \cdot BBP \cdot DIDP \cdot DINP \cdot DNOP) \ \& \ Heavy \ Metal \ Free(Cd \cdot Pb \cdot Hg \cdot Cr6^*)$

98

Gallant GR

Size : 3.0(T) X 450 X 450 mm













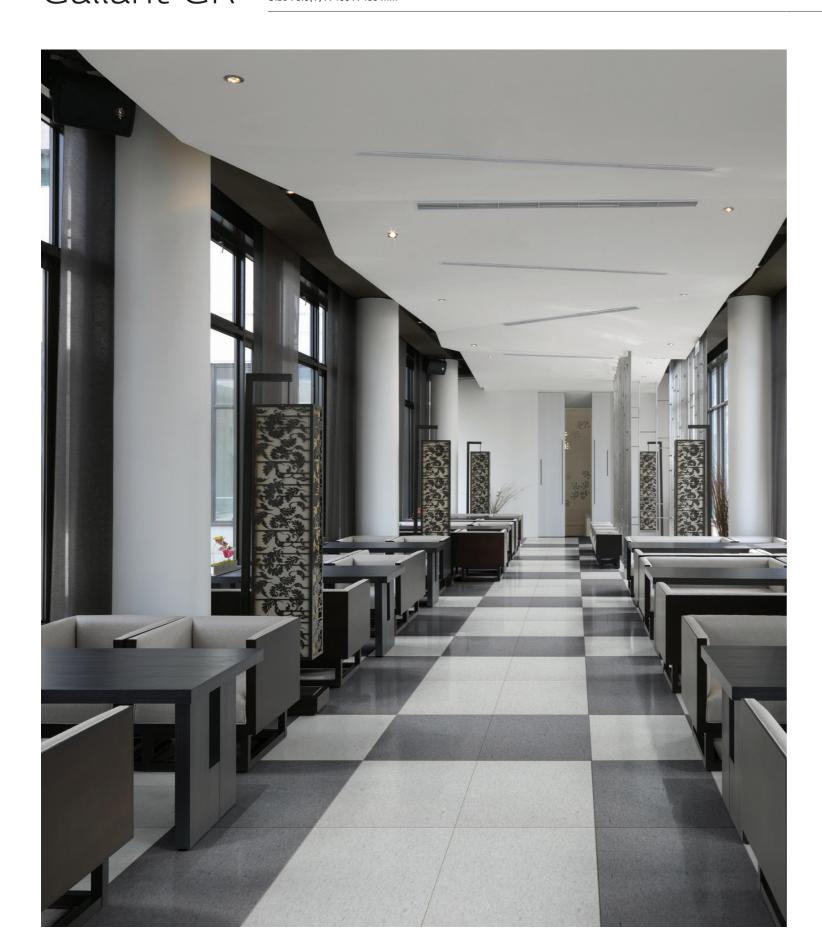

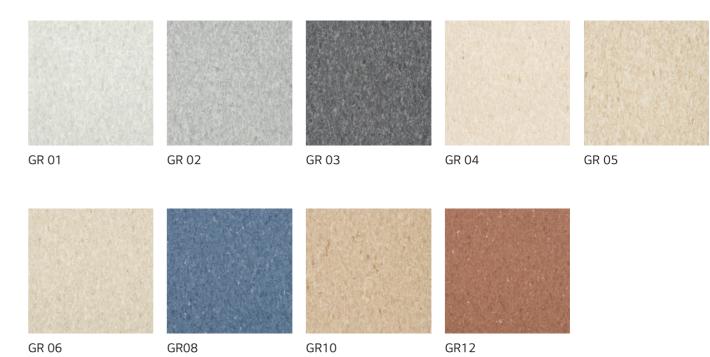

GR 01, 03