



Applications


Office, School, Hospital, Store, Passage, etc

*LG Deluxe tile is
the most widely used
Vinyl Composition Tile
with reasonable cost*



Characteristics

- Marbles are inserted from the surface all the way down to the subsurface to maintain the initial color and shape even when worn off.
- The maintenance is relatively easy and the lifetime is semi permanent due to its excellent endurance.

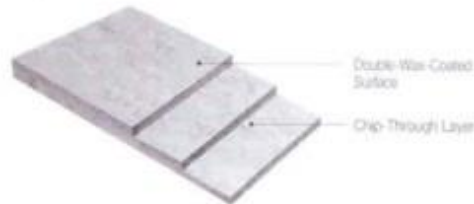

Physical properties

PROPERTY	VALUE	STANDARD
Thickness	3.0mm	ASTM E1066
Static coefficient of friction	Dry: 0.58 Wet: 0.69	ASTM D2047-99
Residual indentation	3.10 %	ASTM F1914-98
Dimensional stability	0	ASTM 6211
Resistance to chemicals	Passes	ASTM F925-02
Static load limit	0.001	ASTM F970-00
Resistance to heat	1.16	ASTM F1514-98
Resistance to light	1.34	ASTM F1515-98
Critical radiant flux	>0.45watts/cm ² (Class 1)	ASTM E648
Smoke generation (flaming)	297.0 (passed)	ASTM E662

